

COBI.time Installation

Requirements

- Node.js Version 22.14.0 LTS
- Microsoft IIS (Web Server)
- [URL Rewrite Module for Microsoft IIS](#)
- PostgreSQL Database
- SAP Business One Service Layer
- SAP Business One 10 (Patch Level 2 or higher)

Preparation & Prerequisites

Node.js Installation


Download the LTS version of Node.js:

nodejs.org/dist/v22.14.0/node-v22.14.0-x64.msi and run the installer.


Keep all default settings during the installation process.

IIS Installation

If Microsoft IIS is already installed, ensure that **Dynamic Content Compression** is enabled. Also verify whether IIS has already been installed:

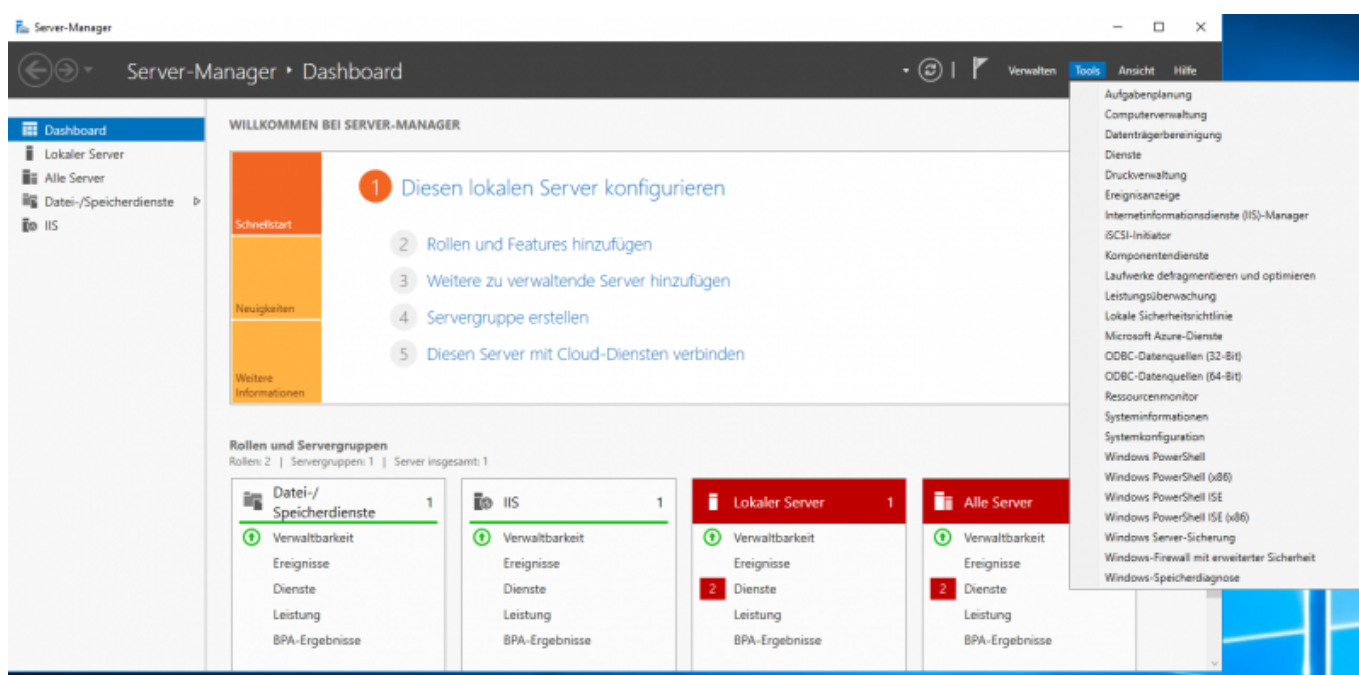




If not, install Microsoft IIS:

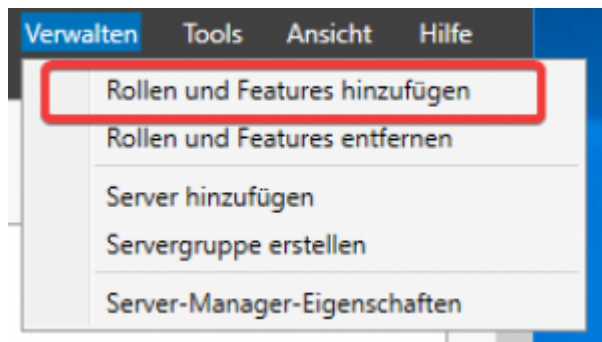

Add Roles and Features:


Click **Next** through the wizard steps:

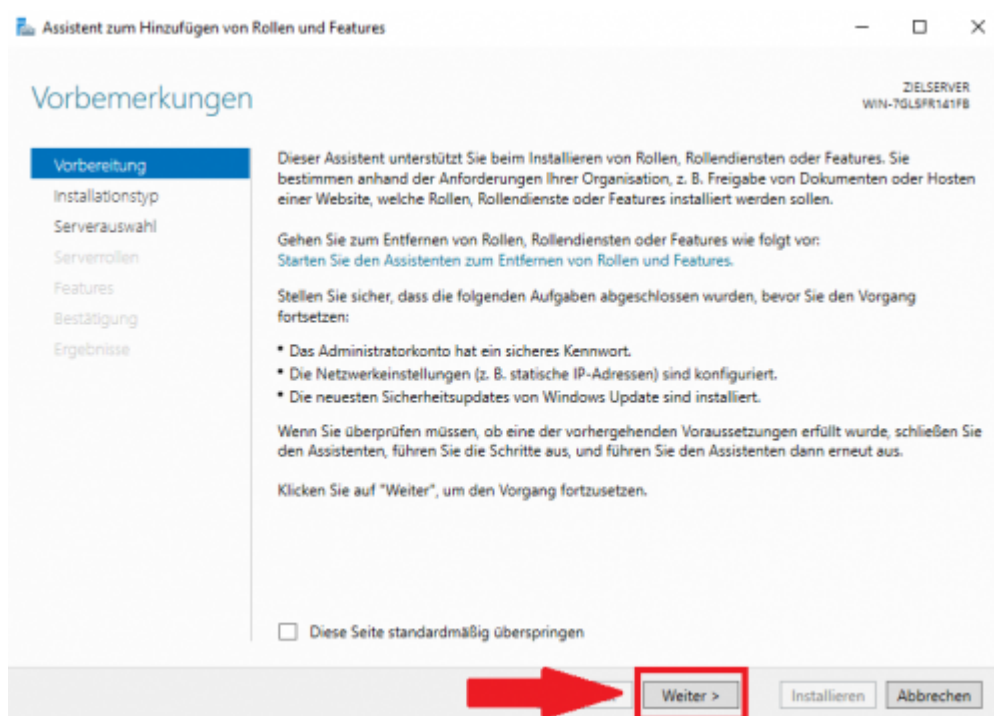

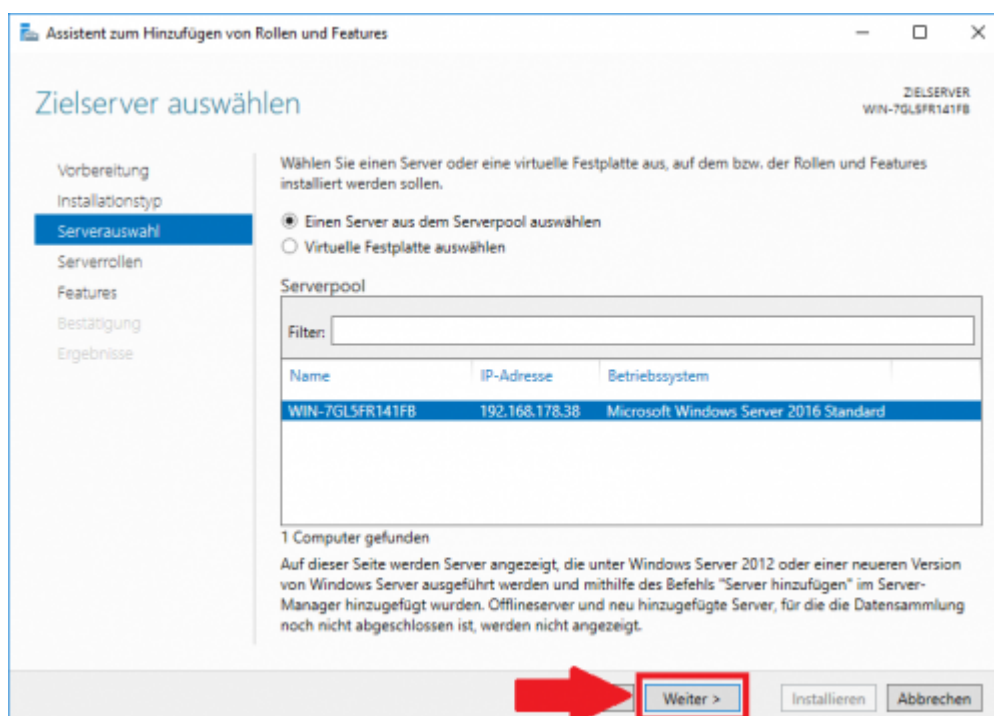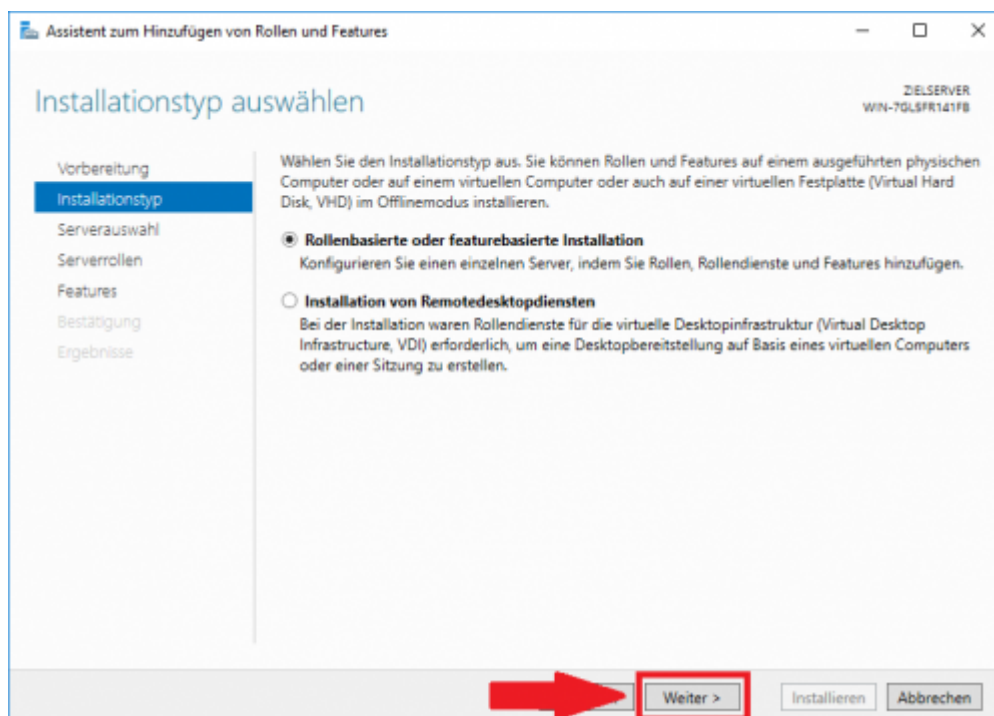

Select the **Web Server (IIS)** role.

Under **Performance**, ensure that **Dynamic Content Compression** is enabled.

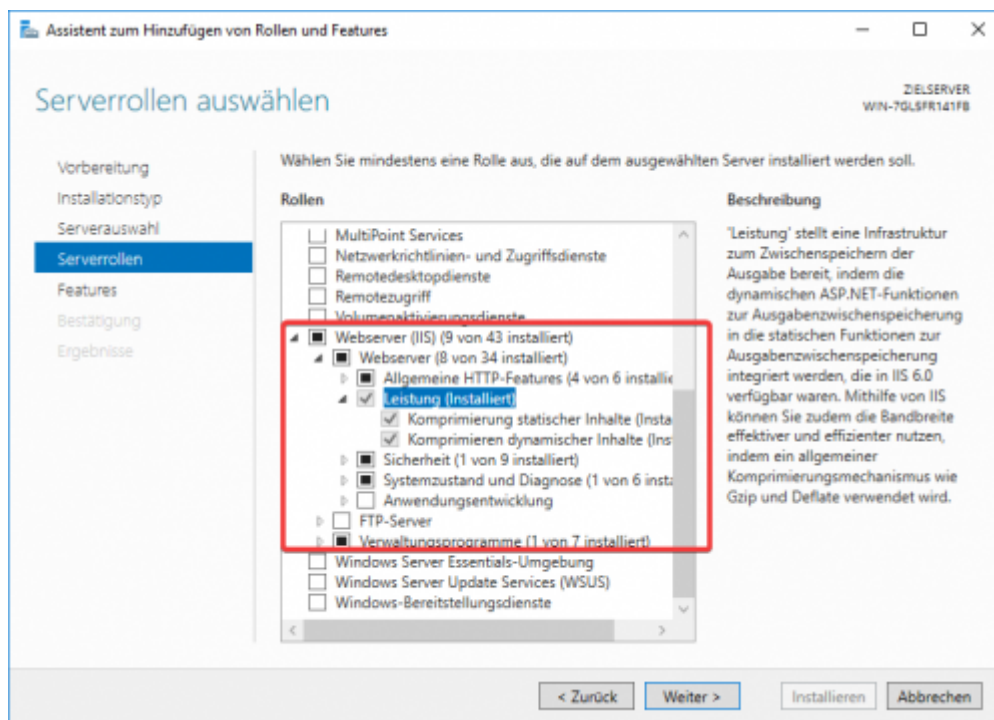

Click **Next** and complete the installation.
A server restart is usually not required.

IIS URL Rewrite Module Installation


After IIS has been installed successfully, install the Microsoft URL Rewrite Module:
<https://www.iis.net/downloads/microsoft/url-rewrite>

COBI.time Setup Wizard

Run the setup executable vX.X.X.X.exe as Administrator to start the installation wizard.


Step 1: Start the Setup

Start the installation using the provided installer file.



Step 2: Select Setup Language

- (1) Select your preferred language (e.g., German or English) from the list.
- (2) Confirm with **OK**.

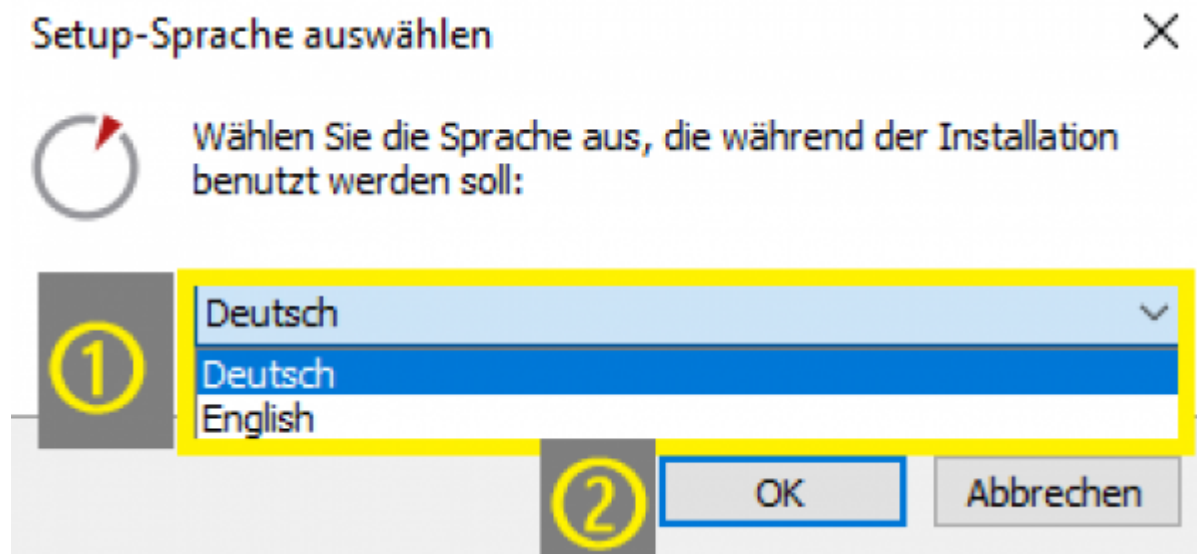


Step 3: PostgreSQL Configuration

Enter the connection information for your PostgreSQL database (host, port, username, password, and database name).
Then click **Next**.

Step 5: Select Installation Directory


Choose the installation path. By default, COBI.time will be installed under `C:\Program Files (x86)\COBI.time`.

Click **Next**.

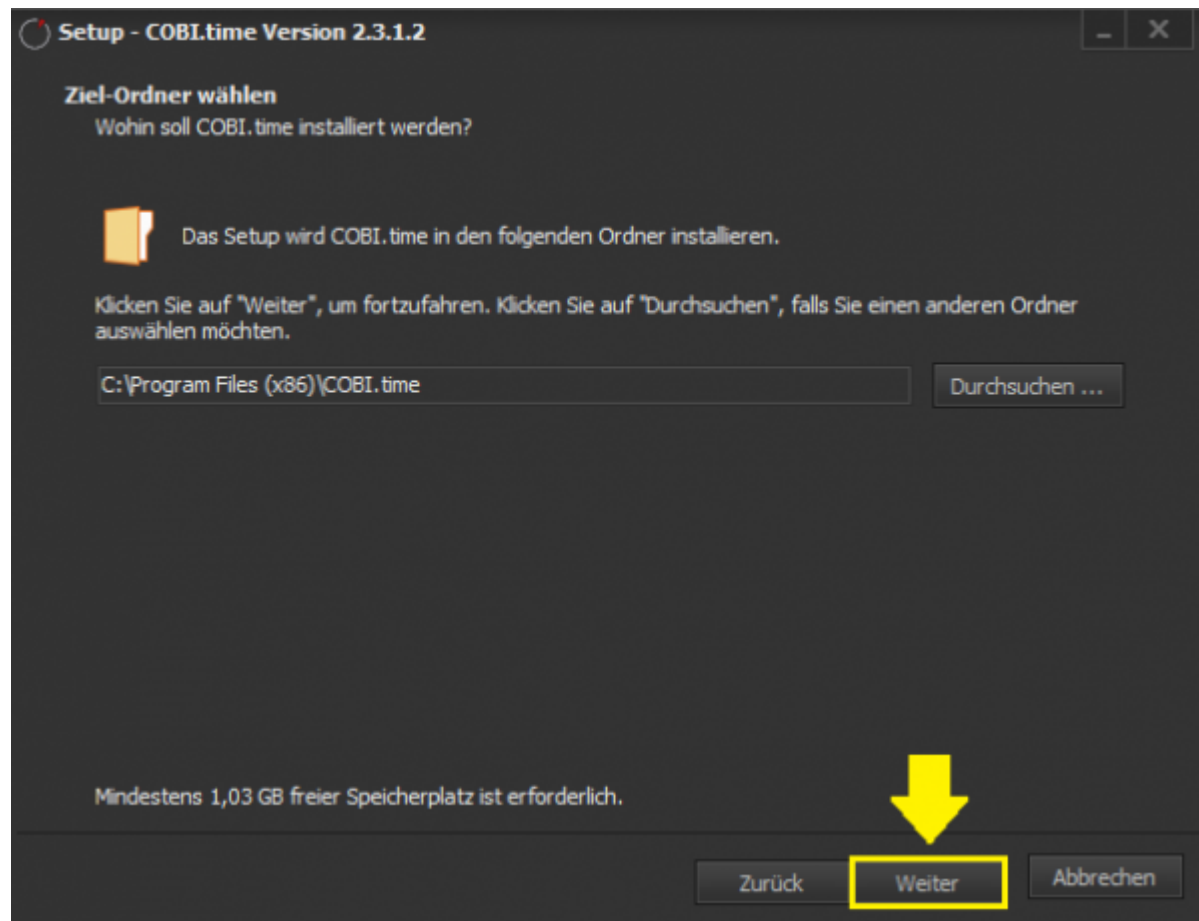

Step 6: Ready for Installation


Review your settings and click **Install** in the bottom-right corner.

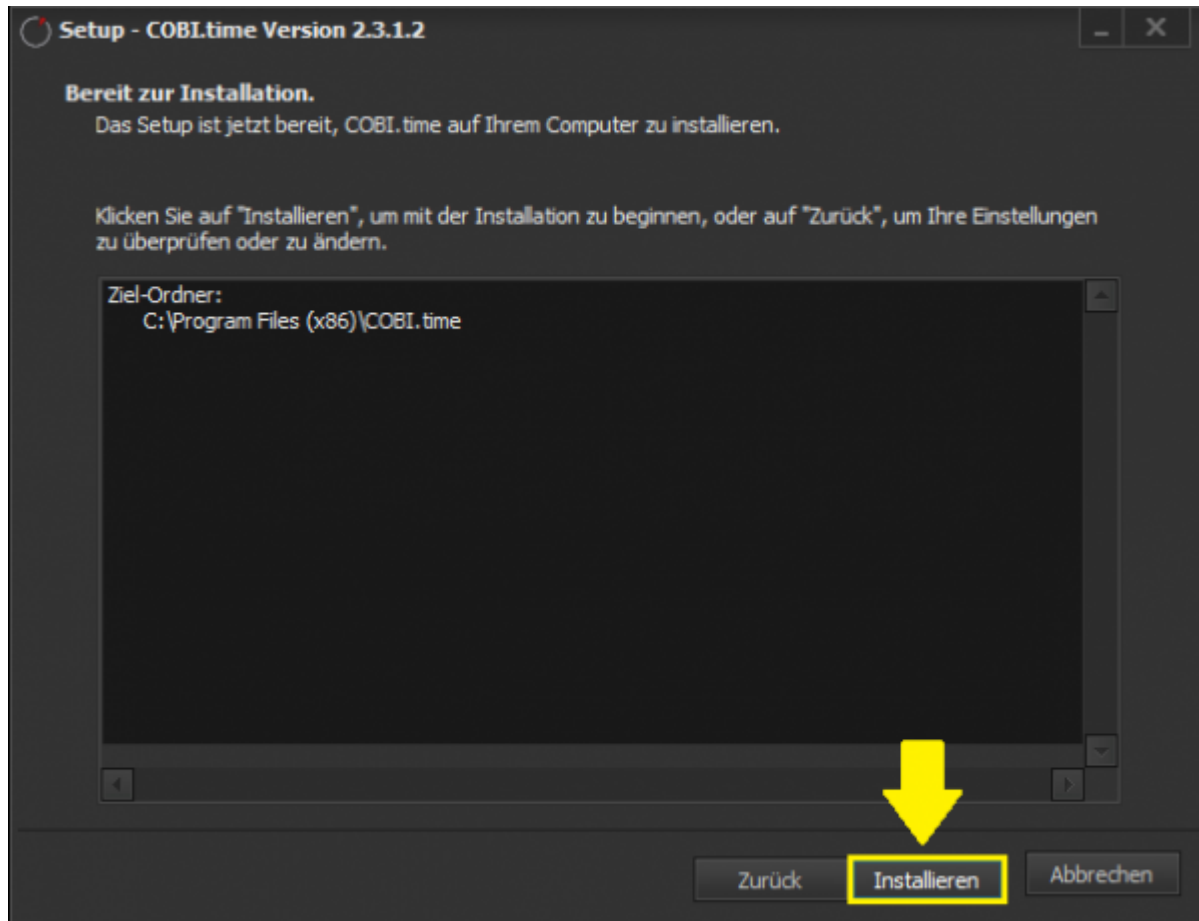

Step 7: Installation & Database Initialization

The installation process takes approximately 5 to 15 minutes.

Confirm the information window `PostgreSQL installed and connection successful!` by clicking **OK**.

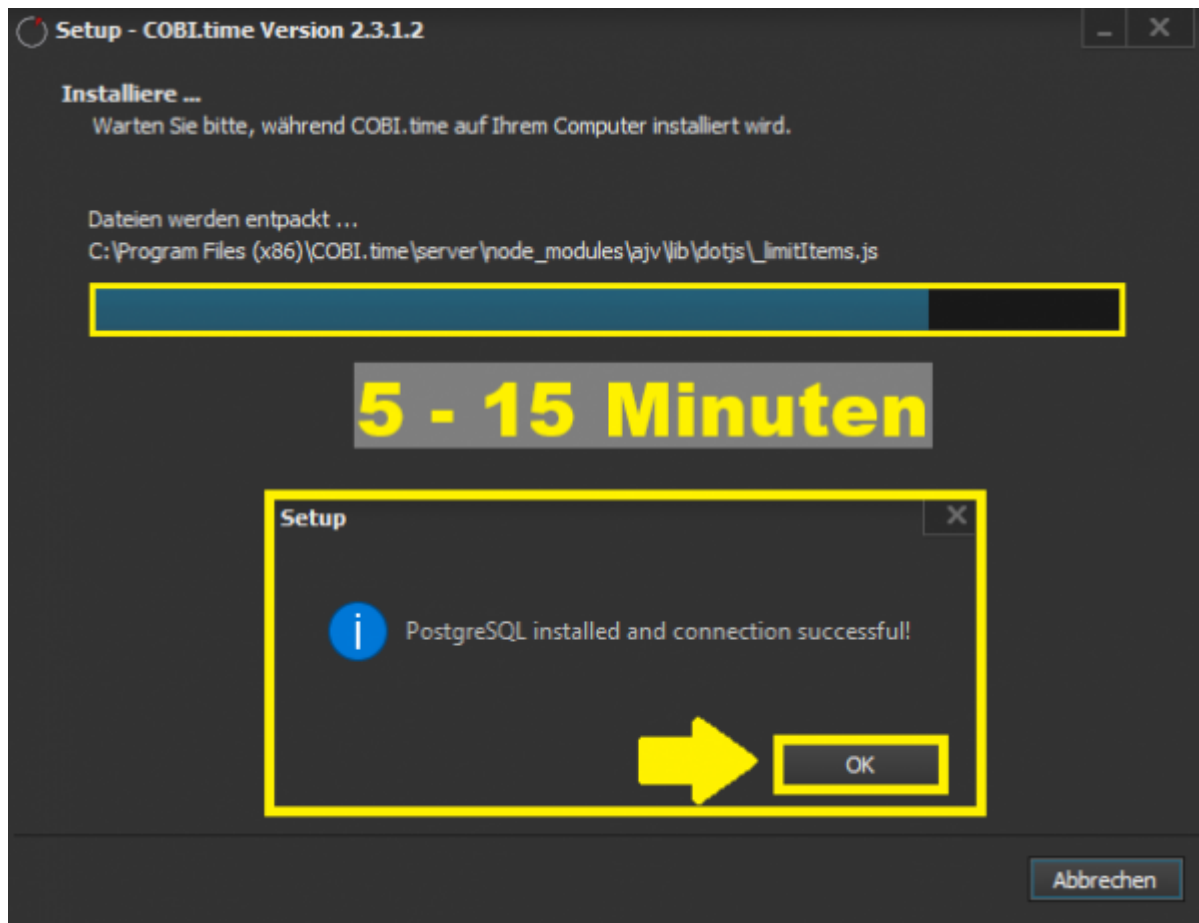

Step 8: Finish Setup


Click **Finish** to close the wizard.



Post Configuration & Service Setup

Configure the .env File

Navigate to the folder `C:\Program Files (x86)\COBI.time\server` and open the `.env` file using a text editor with Administrator privileges:

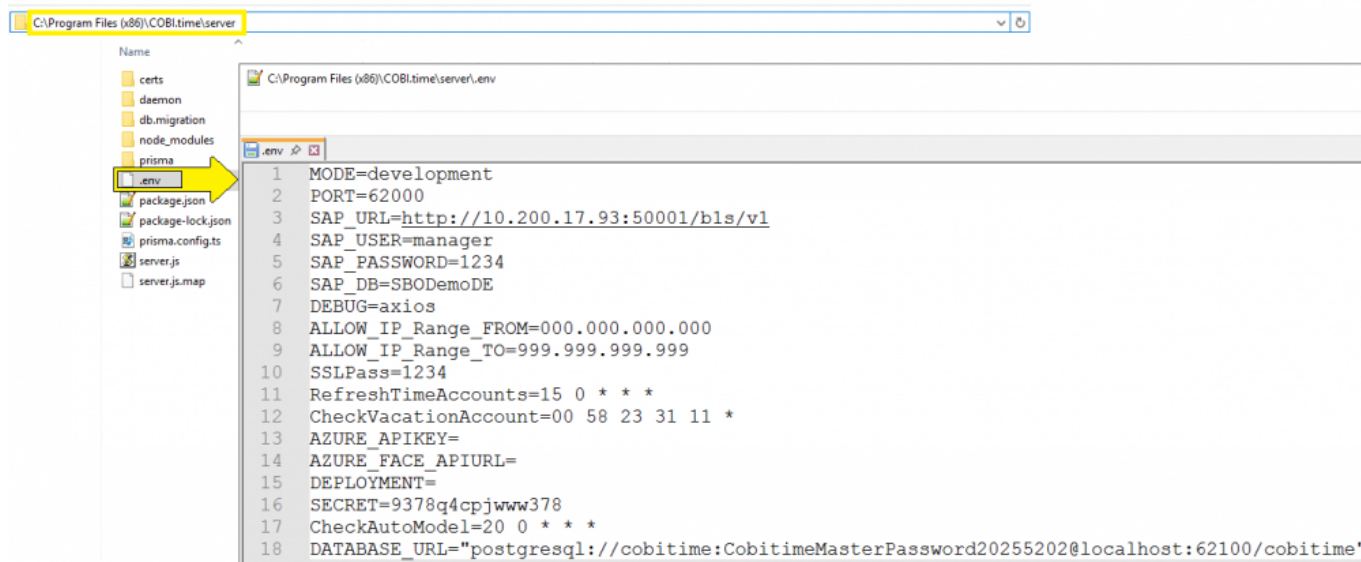

Verify the values. For productive use, adjust the following parameters:

```
MODE=production (Production or development mode. Set to production to
minimize logging.)
PORT=62000 (Specify the backend port for COBI.time.)
SAP_URL=https://localhost:50000/b1s/v1 (Service Layer URL.
Replace localhost with the actual Service Layer IP address.)
SAP_USER=manager (SAP user with an indirect access license or higher.)
SAP_PASSWORD=**** (SAP user password.)
SAP_DB=SB0DemoDE93 (SAP database name.)
SSLPass=1234 (Password for a custom SSL certificate.
Keep 1234 if you do not provide another SSL certificate.)
SECRET=iosncaonmwdol! (Replace with any random string used for token
encryption.)
```

SSL Certificate Note: If you want to use your own SSL certificate, replace the files `cert.pem` and `key.pem` in the folder `C:\Program Files (x86)\COBI.time\server\certs` and adjust the `SSLPass` value in the `.env` file.

Install the COBI.time Service via PowerShell

Open Windows PowerShell as Administrator and execute the following commands:

(1) Change to the server directory:


```
cd "C:\Program Files (x86)\COBI.time\server"
```

(2) Install the Windows service helper package globally:

```
npm i -g qckwinsvc2
```

(3) Register and start the COBI.time service:

```
qckwinsvc2 install name="COBI-time" description="COBI.time Backend Server"
path="C:\Program Files (x86)\COBI.time\server\server.js" args="-a -c" now
```

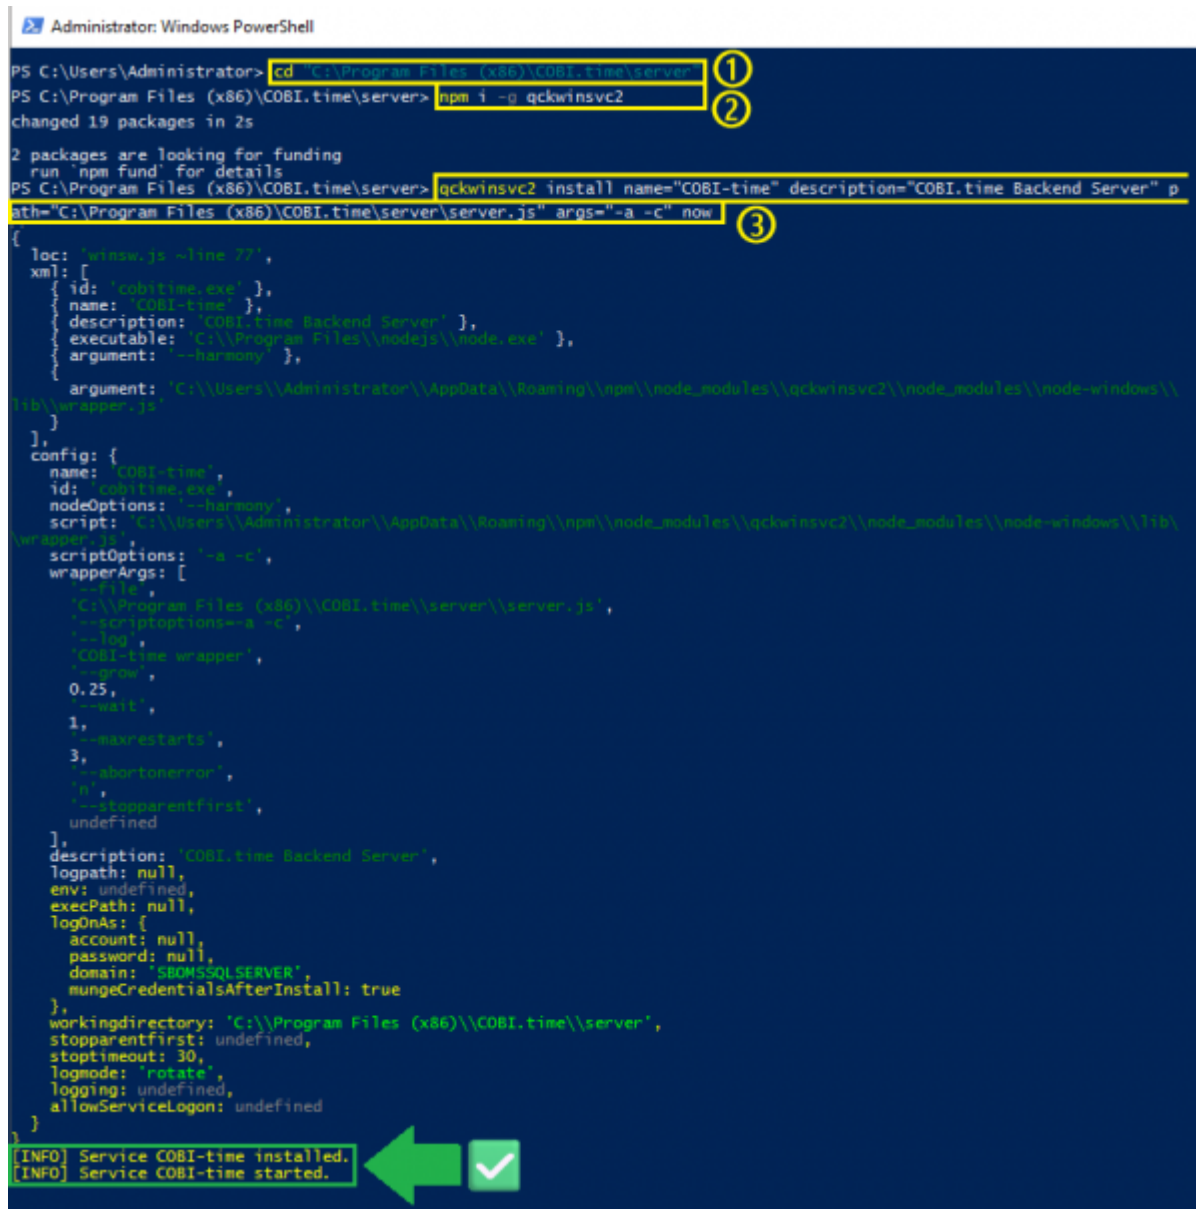


```
Administrator: Windows PowerShell
PS C:\Users\Administrator> cd "C:\Program Files (x86)\COBI.time\server"
PS C:\Program Files (x86)\COBI.time\server> npm i -g qckwinc2
changed 19 packages in 2s
2 packages are looking for funding
  run 'npm fund' for details
PS C:\Program Files (x86)\COBI.time\server> qckwinc2 install name="COBI-time" description="COBI.time Backend Server" path="C:\Program Files (x86)\COBI.time\server\server.js" args="-a -c" now
{
  loc: 'winw.js ~line 77',
  xml: [
    {
      id: 'cobitime.exe',
      name: 'COBI-time',
      description: 'COBI.time Backend Server',
      executable: 'C:\Program Files (x86)\nodejs\node.exe',
      argument: '--harmony',
      argument: 'C:\Users\Administrator\AppData\Roaming\npm\node_modules\qckwinc2\node_modules\node-windows\lib\wrapper.js'
    }
  ],
  config: {
    name: 'COBI-time',
    id: 'cobitime.exe',
    nodeOptions: '--harmony',
    script: 'C:\Users\Administrator\AppData\Roaming\npm\node_modules\qckwinc2\node_modules\node-windows\lib\wrapper.js',
    scriptOptions: '-a -c',
    wrapperArgs: [
      'C:\Program Files (x86)\COBI.time\server\server.js',
      '--scriptoptions=-a -c',
      '--log',
      'COBI-time wrapper',
      'now',
      0.25,
      '--wait',
      1,
      '--maxrestarts',
      3,
      '--abortonerror',
      'n',
      '--stopparentfirst',
      undefined
    ],
    description: 'COBI.time Backend Server',
    logpath: null,
    envs: undefined,
    execPath: null,
    logOnAs: {
      account: null,
      password: null,
      domain: 'SBOMSSQLSERVER',
      mungeCredentialsAfterInstall: true
    },
    workingdirectory: 'C:\Program Files (x86)\COBI.time\server',
    stopparentfirst: undefined,
    stoptimeout: 30,
    logmode: 'rotate',
    logging: undefined,
    allowServiceLogon: undefined
  }
}
[INFO] Service COBI-time installed.
[INFO] Service COBI-time started.
```

Ensure that the confirmation message `[INFO] Service COBI-time started.` appears at the end.

Verify the Service in Windows Services


Open the Windows Services Manager (`services.msc`).

Locate the **COBI-time** service and ensure that its status is **Running** and its startup type is set to **Automatic**.

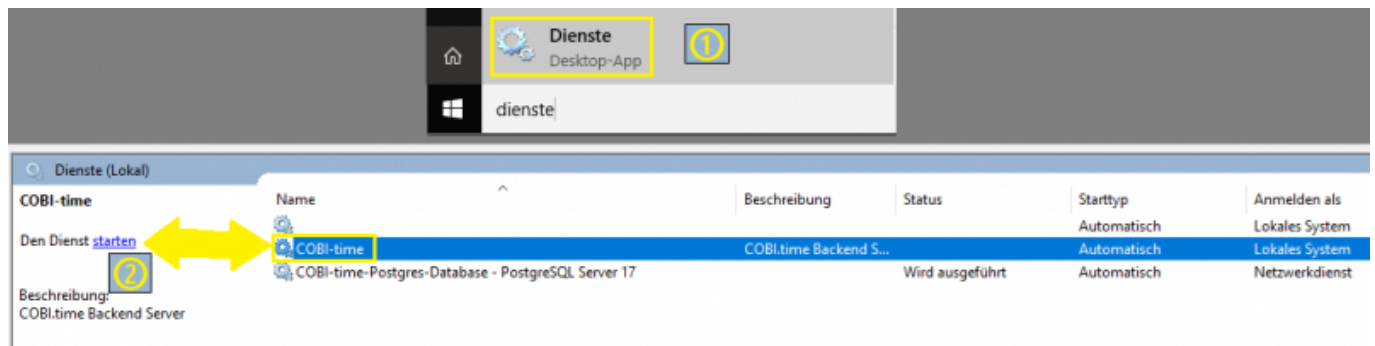


IIS Web Server Configuration


1. Open **Internet Information Services (IIS) Manager**.

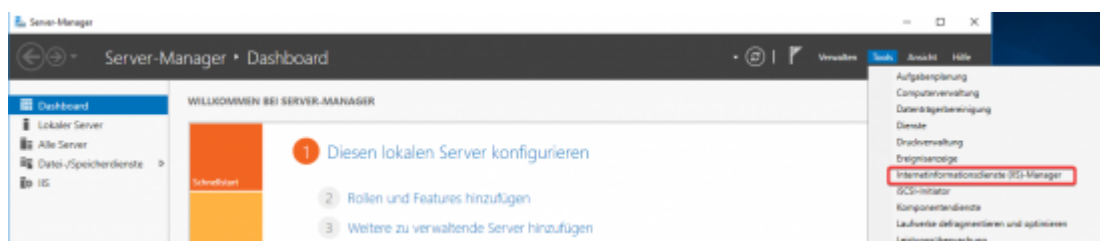

2. Select the **Default Web Site** and change the physical path to:


``C:\Program Files (x86)\COBI.time\dist``

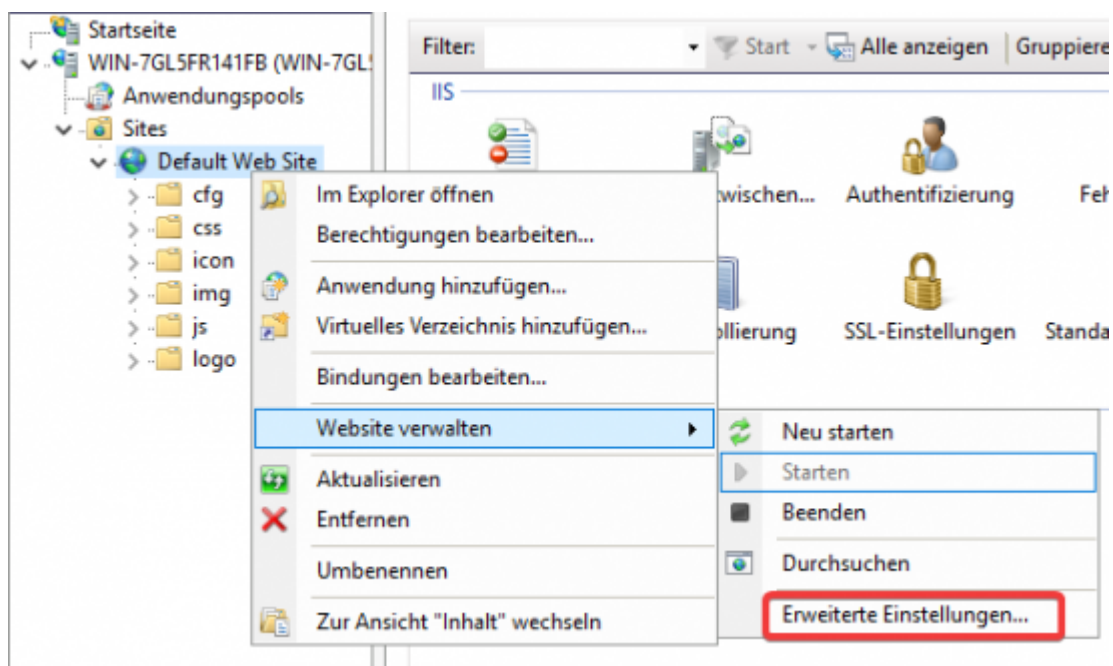

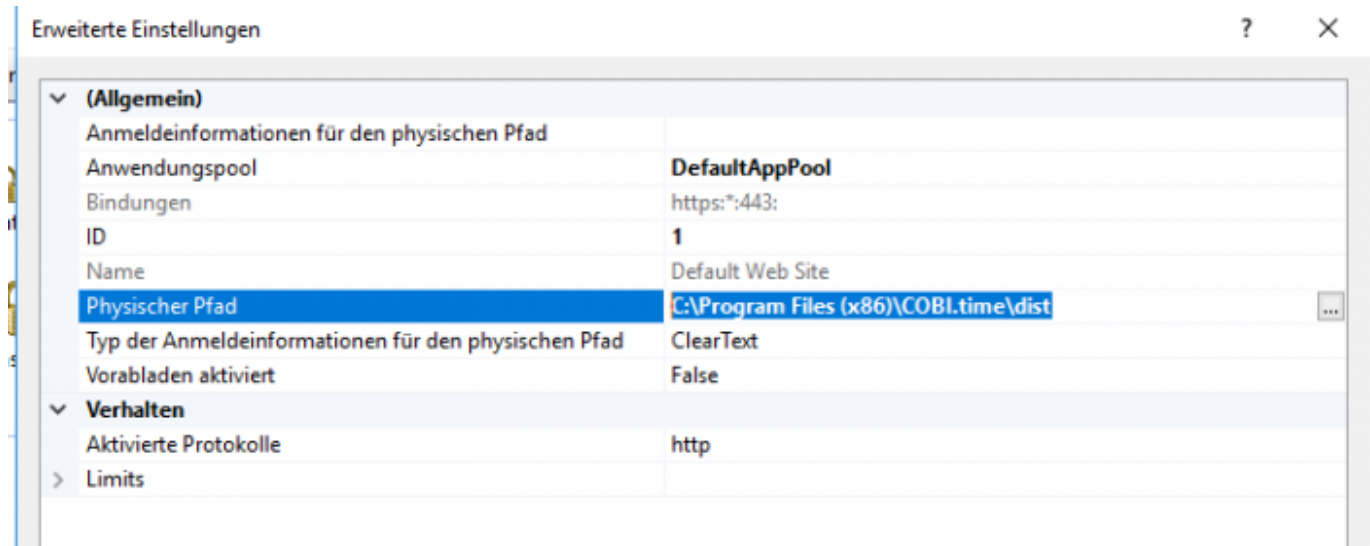


3. Import the Server Certificate:

- Open **Server Certificates**.
- Right-click → **Import...**
- Select the certificate file `C:\Program Files (x86)\COBI.time\server\certs\cobitime.pfx` (default password: `1234`) or use your own SSL certificate.

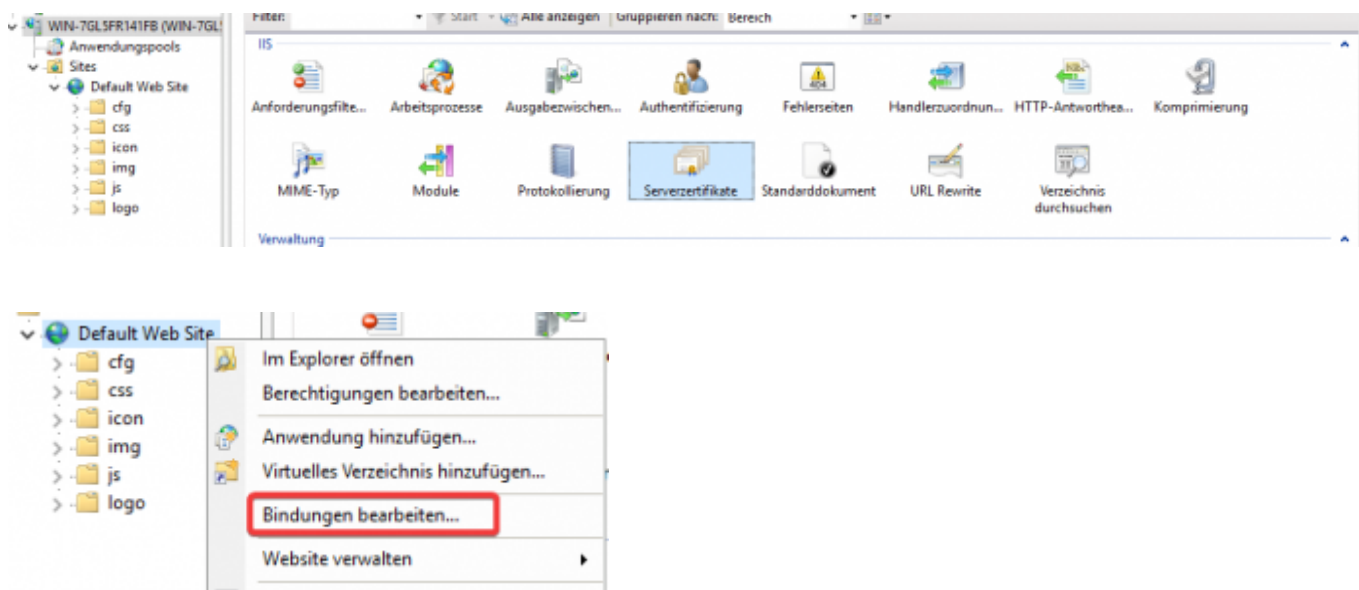

4. Adjust Site Bindings:

- Remove the HTTP binding.
- Add an HTTPS binding and select the imported SSL certificate.
- Important: Enable the **Require Server Name Indication (SNI)** option.

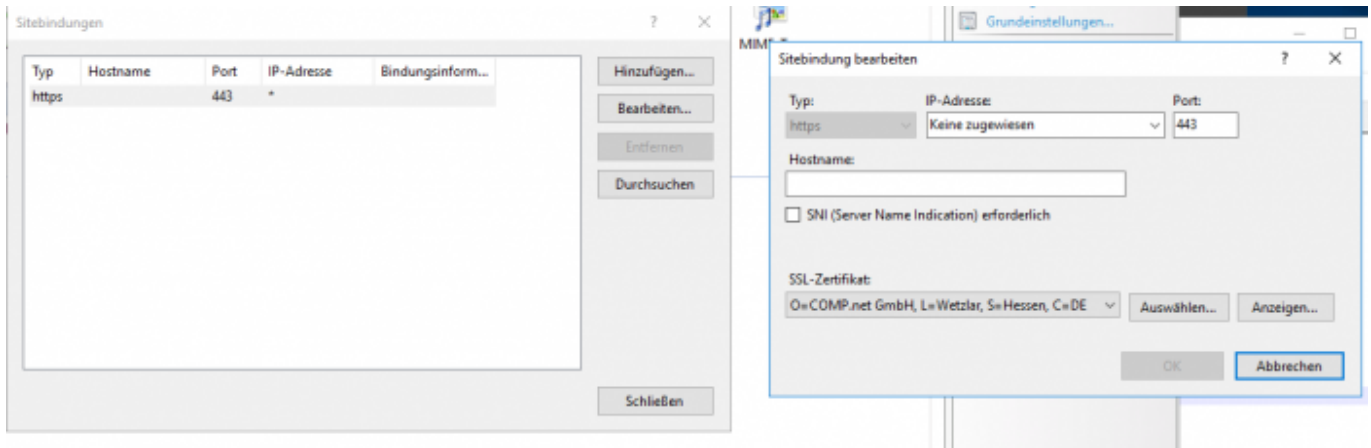

Configure Backend Connection in the Frontend

Navigate to the folder `C:\Program Files (x86)\COBI.time\dist\cfg` and open the file `settings.js`.

```
settings.js
(function(window) {
  window.__env = window.__env || {};

  window.__env.apiUrl = {
    url: "https://192.168.2.108:62000",
  };
  window.__env.debug = false;
  window.__env.faceRecognition = true;
})(this);
```

For the backend URL, enter the server IP address or hostname including the port configured in the `.env` file (e.g., `https://10.200.17.93:62000`).

Initial Setup of COBI.time Data Structures (Web Setup)

Important: Since COBI.time creates custom tables and fields in SAP Business One, make sure that **all users are logged out of SAP Business One** during the initial setup.


1. Ensure that the **COBI-time** service is running. 2. Open your browser and navigate to the setup page:

`https://localhost/Setup` (or your server address). \\



3. The web setup will automatically guide you through the creation of the required SAP tables, fields, and initial data:

- **Create Tables:** Click **Execute**. Once completed, restart the **SAP Service Layer** and confirm with **OK**.
- **Create Fields:** Click **Execute** again. Restart the **SAP Service Layer** a second time and confirm with **OK**.
- **Import Initial Data:** Click **Execute** one final time.

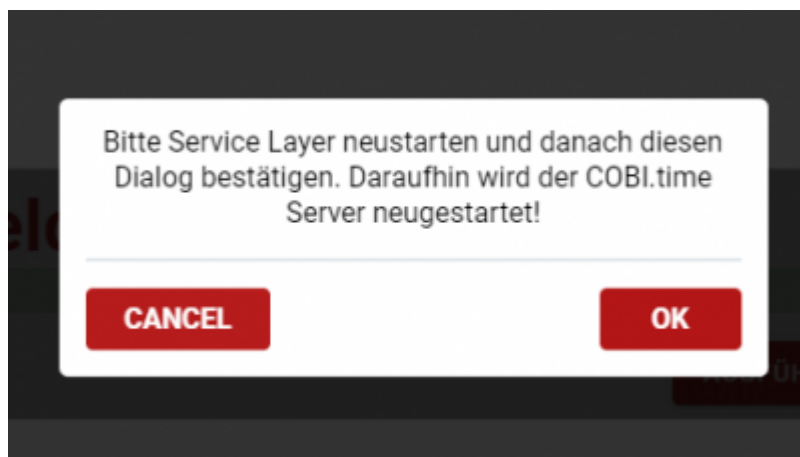

4. After completion, you will automatically be redirected to the login page (<https://localhost/Login>).

You can now log in using the default administrator credentials:

- **Username:** `admin`
- **Password:** `admin`

Security Notice: Change the administrator password immediately after the first login!

PIN Activation (optional)

To enable PIN entry in COBI.time, an activation password is required.

Prerequisite (Server): On the server, a password must be defined in the .env file (activation password).

This password is not stored in COBI.time itself but is only used once to activate the PIN function on the device.

Content example:

.env

```
PinLoginPassword=test
```

Uninstallation

Remove COBI.time Service

Use the following command to uninstall the COBI.time Service:

```
qckwinsvc --uninstall --name "COBI-time"
```

After that you can just remove the COBI.time installation from your computer.

From:

<https://docs.cobisoft.de/wiki/> - **COBISOFT Documentation**

Permanent link:

https://docs.cobisoft.de/wiki/cobi.time/installation_guide?rev=1785757819

Last update: **2026/08/03 13:50**

